

BANNER & WITCOFF, LTD.  
INTELLECTUAL PROPERTY LAW1001 G STREET, N.W.  
WASHINGTON, D.C. 20001-4597TEL: 202.824-3000  
FAX: 202.824-3001  
www.bannerwitcoff.com

## FACSIMILE TRANSMITTAL SHEET

TO:	FROM:
Examiner Sisay Yacob	Jordan Bodner
COMPANY:	DATE:
U.S. Patent and Trademark Office	March 27, 2007
FAX NO.:	TOTAL NO. OF PAGES: (including cover sheet)
1-571-273-8562	44
YOUR REFERENCE NOS.:	OUR REFERENCE (C/M) NO.:
10/769,206	005222.00322
RE: Submission of Priority Document and Copy of Certified Priority Document EP03250577.8	
<i>If you do not receive all page(s) or have any problems receiving this transmission, please call:</i>	
NAME:	PHONE:
Jessica Williams	202-824-3257

## COMMENTS:

Please confirm receipt of this document.

Thank you.

Jordan N. Bodner

**Important/Confidential:** This message is intended only for the use of the individual or entity to whom it is addressed. This message contains information from the law firm of Banner & Witcoff, Ltd. which may be privileged, confidential or exempt from disclosure under applicable law. If the reader of this message is not the intended recipient, you are hereby notified that any dissemination, distribution, retention, archiving, or copying of the communication is strictly prohibited. If you have received this communication in error, please notify us immediately at our telephone number listed above. We will be happy to arrange for the return of this message to our offices at no cost to you.

CHICAGO

WASHINGTON, D.C.

BOSTON

PORTLAND, OR

## PATENT APPLICATION

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:	)	Group Art Unit: 2612
	)	
Alan Harris	)	Docket No. 005222.00322
	)	
Serial No. 10/769,206	)	Confirmation No: 7582
	)	
Filed: January 29, 2004	)	Examiner: Sisay Yacob

For: Event Detection and Transmission System

**SUBMISSION OF PRIORITY DOCUMENT**

U.S. Patent and Trademark Office  
Customer Service Window  
Randolph Building  
401 Dulany Street  
Alexandria, VA 22314

Sir:

Submitted herewith is a copy of the certified copy of the priority document of EP 03250577.8, which was filed in the European Patent Office on January 30, 2003. This application is the basis for Applicant's claim for priority, which claim was made upon filing of the above-identified patent application on January 29, 2004.

Please charge any fee associated with the filing of this paper to our Deposit Account

No. 19-0733.

Respectfully submitted,

BANNER & WITCOFF, LTD.

By: /Jordan N. Bodner/  
Jordan N. Bodner  
Reg. No. 42,338

Banner & Witcoff, Ltd.  
1100 13<sup>th</sup> Street, N.W., Suite 1200  
Washington, D.C. 20005-4051

Dated: March 27, 2007



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

RECEIVED

22 MAR 2004

Bescheinigung

Certificate

Attestation

WIPO

PCT

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03250577.8

GB/04/394

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

Europäisches  
PatentamtEuropean  
Patent OfficeOffice européen  
des brevets

Anmeldung Nr:  
Application no.: 03250577.8  
Demande no:

Anmeldetag:  
Date of filing: 30.01.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Accenture Global Services GmbH  
Geschäftshaus Herrenacker 15  
8200 Schaffhausen  
SUISSE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

event detection and transmission system

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04Q7/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT SE SI SK TR LI

03250577.8

2

EPA/EPQ/OEB Form 1014.2 - 01.2000 7001014

1

5395030

EVENT DETECTION AND TRANSMISSION SYSTEM

5 The present invention concerns a data acquisition and  
transfer system for transferring data via the mobile  
phone network. It is particularly but not exclusively  
concerned with the transfer of data from individuals to  
a central reception point and it is contemplated that the  
data may take many different forms. However, one  
important feature with which the present invention is  
10 concerned is that the major telecommunications operators  
and electronic suppliers are at present involved in the  
complex and difficult process of moving from the second  
generation of mobile phones to the third generation. As  
a result of this shift major companies are going to own  
15 increasingly under-utilised second generation digital  
networks and manufacturing capabilities for some time to  
come. Thus an aspect of the present invention is  
concerned with providing a range of opportunities which  
will enable these under-utilised facilities to remain  
20 revenue generating in a profitable manner.

One such opportunity lies in the field of drug testing.  
The process of testing new drugs in order to have them  
approved by the appropriate regulatory bodies can cost  
25 major drug firms up to a million dollars in lost revenue  
for each extra day needed to get approval.

2

5395030

One of the reasons it takes so long to get drugs approved is the length of time it takes to get sufficient good quality data out of the trials which have to be carried out. Doctors frequently mis-record data, and double-blind trials are expensive and take time to arrange. It is believed that schemes already exist to bypass the problems raised for example by doctors' handwriting and other vagaries in which test data is captured via the web. However errors still occur and the data is often inaccurate.

Thus in accordance with one aspect of the present invention data will be collected directly from the patient and from the receptacle from which the trial drug is dispensed.

It will, however, be appreciated that the basic inventive concept is applicable to a wide range of fields and is not necessarily limited to the concept of drug trials. Thus as will be apparent from the following description the inventive concept is applicable to monitoring the health of individuals who are not undergoing drug trials, locating or monitoring individuals for security purposes and also for carrying out regular checks on operating machinery.

3

5395030

In order that the present invention may be more readily understood, the embodiments thereof will now be described by way of example and with reference to the accompanying drawings in which:

5

Figure 1 is a schematic diagram of the overall system architecture;

10

Figure 2 is a diagram showing elements of the present invention in conjunction with the public services telephone network;

Figure 3 is a block diagram of a sensor/transmitter;

15

Figure 4 is a plan view of a pill receptacle which can be used in the system shown in Figures 1 and 2;

Figure 5 is a block diagram of the active components of Figure 4;

20

Figures 6 and 7 are flow charts showing modes of operation of the device of Figure 5;

Figure 8 shows another form of pill receptacle;

25

Figure 9 shows a sensor bracelet; and

4

5395030

Figure 10 is a block diagram of data reception and polling terminal incorporating the present invention.

Referring now to the drawings, Figure 1 represents in a generic fashion a family of monitoring and transmitting devices which will be described in greater detail hereinafter. Block 1 represents a generic sensor device for obtaining data and for transmitting the acquired data. Block 2 represents the data telecommunications networks (and their operating companies) over which the data is transmitted to the device 1 so as to trigger a response to data which is transmitted from the device 1 either in response to a change in the circumstances of the device, to a signal initiated by an internal clock or in response to a request received to and from a processing centre shown at 3. Block 4 represents a user of the system for which the data, perhaps after analysis in block 3, is eventually returned. The directions of transmission of the data are shown by the headed arrows.

Turning now to Figure 2 of the accompanying drawings, this shows a conventional representation of the public services telephone network at 5. Connected to the PSTN 5 are a number of blocks 1a...1n each corresponding to block 1 of Figure 1. As will be appreciated these devices need not be identical and may in fact have a



5

5395030

number of different functions. It is for this reason that some of the devices are connected to the PSTN 5 by double headed arrows indicating that they are capable of both receiving and transmitting data to the centre 3 whilst other devices only have a single headed arrow indicating that they are only capable of sending data to the centre 3. As there are several different types of device 1, there may also be several different organisations each interested in acquiring data so that Figure 2 shows three such organisations 4a...4c.

Turning now to Figure 3 of the accompanying drawings, this is a block diagram of circuitry which can be employed in the devices 1a...1n. Thus the block diagram comprises a sensor 6 shown in the figure as having two data inputs, data 1 and data 2 and adapted to send data corresponding to the two inputs to a second generation transmit/receive circuit 7. The circuit 7 operates under the control of a microprocessor CPU unit 8 which also controls a clock 9. The clock reduces power consumption of the sensor by only switching the sensor on in response to appropriate commands from the CPU 8. Thus in several of its potential functions the device has a power saving sleep mode. Thus the sensor can sense data 1 and data 2 either simultaneously or at staggered intervals which need not be the same. Because of the possibility that

6

5395030

the sensors may be required to operate over extended periods of time the question of power usage is of considerable importance and this feature will be described in greater detail hereinafter in conjunction with Figure 10 of the accompanying drawings. The transmit/receive circuit 7, the CPU 8, and the clock 9 may all be formed as a microcircuit on a single chip. The circuit can include an optional memory 10 and also includes a power source 11 which can be any suitable small battery such as the lithium batteries used to power calculators and digital watches. It is of course entirely possible for the power source to include photocells so that electrical energy can be generated by ambient light.

15

It will be appreciated that the nature of the sensor has not been specified and it is of course possible for the sensor to have only a single data input or a plurality of data inputs greater than two in number in accordance with the functions of the sensor within the overall system.

20

Returning now to device 1a of Figure 2

25

It will be appreciated that the device shown in Figure 3 is essentially a generic one and that certain of the

7

5395030

devices shown in Figure 2 have only a one-way communication path with the PSTN 5 so that they cannot be interrogated by the centre 3. In these devices the send/receive circuit 7 need of course only have a send capability so that it can be simplified. Naturally if efficiencies of scale are present it may be simpler to have a send/receive capability in every device with the receive facility only being enabled in the appropriate circumstances.

10

One embodiment of a device such as 1a will now be described with regard to Figures 4 and 5 of the accompanying drawings. Thus device 1a is concerned with monitoring a drug testing program in which the patient has to take a regular dosage of the drug under test and in which a drug company is interested in the patient's response to this dosage. In this embodiment it is accordingly necessary for the drug company to know both when a pill is taken and the response by the patient to the taking of the drug. In its simplest form the device 1a will merely indicate that the patient has opened the pill receptacle. On the opening of the receptacle, the sensor is intended to give an instruction to the transmit circuit to send a short text message to the processing centre 3 where the fact that the receptacle has been opened, and the timing of its opening, is logged for

25

8

5395030

future analysis and transmission to the initial user, namely the drug company, for whom the data is intended.

5 Figure 4 of the drawings shows a typical receptacle for pills in the form of a laminated strip 20 having an electro conductive metal foil surface provided with recesses 21 each holding a single pill. The sensor and its associated circuitry and power supply are located at 22. When the patient breaks the laminated foil to remove 10 a pill, this is detected by the sensor which causes the send circuit 7, shown in Figure 5, to send the appropriate message. In Figure 5 the laminated foil is again shown at 20 and provides a conductive path between the power source 11 and the sensor 6 which path is 15 changed each time the laminate is broken to enable the patient to remove a pill. Accordingly the sensor 6 can operate by detecting changes in the resistance or capacitance of the conductive foil. The foil and the various items of circuitry are mounted on a backing strip 20 22 of suitable material such as thick paper or cardboard which is relatively tougher than that of the foil so that a user will preferentially break the laminate to activate the sensor. Given that the device employs a microprocessor and associated memory it is possible to 25 pre-program the device with a schedule so that if the schedule is not followed an alert message is transmitted

9

5395030

to the centre 3.

5 In applications where the intervals between pills being  
taken are not critical to the safety of the patient, a  
more sophisticated embodiment of the present invention  
may be used. In one such embodiment, data will be  
transmitted to the centre 3 on the transmission of a  
polling request from the centre 3. In such a case the  
10 breaking of the foil might not cause the immediate  
transmission of a signal to the centre 3 but will merely  
cause the fact that the foil has been broken to be stored  
in memory. Accordingly, when a request is received the  
stored data will then be sent as before. In another  
variant information about the timing of each pill's  
15 removal can be stored in memory contained within the foil  
pack, and all such stored data may be transmitted in a  
single communications session, so that the battery power  
requirements of the foil pack, and thus its size and  
weight, are reduced.

20

There will now be described a more sophisticated variant  
of the device just described with reference to Figures  
4 and 5. As already mentioned it may well be that the  
drug company instigating the tests will require further  
25 information in addition to the fact that a patient has  
been taking his/her pills at the appropriate times and

10

5395030

logging the times at which the pills were taken. Thus  
it is entirely possible for the drug company to wish to  
be able to monitor changes in the patient's condition  
when undergoing the drug regime. In such a situation it  
5 may be necessary for the patient to be provided with two  
sensing and transmitting devices. One device could be  
similar to the device just described with regard to  
Figures 4 and 5 whilst the other device could be a more  
sophisticated variant of this device which is attached  
10 to the patient and which monitors factors relevant to the  
patient's state of health. Such factors could be blood  
pressure, temperature, heart rate, skin pH and  
perspiration rate etc. and will of course depend on the  
nature of the drug being tested. Accordingly in this  
15 variant of the present invention the sensor 6 will accept  
a number of different inputs so that the required  
information can eventually be transmitted to the main  
centre 3. Additionally in order to conserve power the  
sensor may only be activated in response to a request  
20 received at the circuit 7 for stored information to be  
sent as text messages back to the centre 3. One way of  
ensuring that the data is relevant would be to time the  
polling request appropriately in response to data already  
transmitted with regard to the timing of the patient's  
25 taking of the drug. In this scenario it is assumed that  
there is no direct linkage between the sensor monitoring

11

5395030

the patient's condition and the sensor monitoring the taking of the drugs. However, in another variant one or other of the devices could send its stored data to be appended to the data stored in the other device so that on interrogation from the centre 3 all the appropriate data is transmitted at the same time.

The device associated directly with the patient could be in the form of a bracelet worn by the patient or in the form of a patch such as one or more electrodes attached directly to the patient's skin by suitable adhesives or taping and worn under the patient's clothing.

The flow diagrams of Figures 6 and 7 show alternative ways in which the generated data can be accessed by the centre 3. In these flow diagrams 6a represents the sensor 6 shown in Figures 4 and 5 and 6b represents a similar sensor but monitoring health characteristics of the patient involved. It will be appreciated that both of these sensors are similar to the one described with reference to Figure 3.

In the flow diagram of Figure 6 it is assumed that the sensor 6a operates in its normal manner and when a pill is taken transmits this fact at step S1 to the centre 3

12

5395030

where it is received at step S2. At step S3 a computer (not shown) at centre generates a log indicating that a particular patient has taken a particular pill at a particular time. In step S4 the centre 3 sends a request to interrogate the sensor 6b and to request the latter to transmit in step S5 the data that it has acquired back to the centre 3 so that this data can be added to the log generated at step S3. Naturally the data accessed in the transmit request step S4 can also include previous data which has been stored by the sensor 6b at appropriate intervals after the last time it was polled by the centre 3.

In the flow diagram of Figure 7 an alternative scenario is shown in which the output of sensor 6a in response to the removal of a pill is stored in memory at step S8 together with data from sensor 6b for subsequent transmission. In step S8 the centre 3 generates a poll signal to interrogate the stored data.

In response to this interrogation step a step S9 makes the decision as to whether or not one or more pills have been taken since the last poll of the device. This information would of course be of importance to the company making the drug trial. Whether or not a pill has



13

5395030

been taken data concerning the patients condition is transmitted in step S10 and the fact that a pill has been taken is flagged in step S11. If a pill has not been taken this information is also supplied to step S12 where  
5 a log of the available data is generated for subsequent use.

It will be appreciated that the embodiment of Figure 7 could be changed in a relatively simple manner by keeping  
10 the data separate in two streams in which each memory 10 of each sensor device is interrogated by the centre 1 with each sensor device sending its relevant data independently of the other to generate the final log at the centre 1.

15

It will be appreciated that in the system just described the quality of data gathered is likely to be much more accurate than similar data gathered by a doctor or even from a patients own records and it would also be gathered  
20 much faster. The advantage for this for the drug company carrying out the tests is clear in that there will be reduced time delay before a successful drug can be marketed. Additionally for the telecommunication network operator the advantage is higher utilisation of their  
25 network, but with limited life span contract thus for a

14

5395030

5 drug testing program each sensor might be required to be  
able to operate over a matter of a few weeks or months.  
For the electronic suppliers there will be the  
corresponding advantage of the opportunity to get more  
10 utilisation out of their 2g second generation cellular  
telephone chip set production capabilities. However, it  
must be appreciated that exactly the same concept may be  
applied when inevitable progress means a move from third  
generation chip sets to fourth generation chip sets and  
so on.

15 It must be appreciated that the receptacle for pills  
disclosed in Figures 4 and 5 can take other forms. Thus  
Figure 8 shows the receptacle in the form of a standard  
pill bottle 30. In such a case the sensor 6 will merely  
record for transmission the removal of the lid of the  
bottle.

20 Figure 9 shows a bracelet 40 which can be worn by a user,  
in order to detect variations in the user's bodily  
functions.

25 As already mentioned the basic sensor configuration shown  
in Figure 3 has the potential to carry out a wide range  
of functions. Thus the device shown at 1b in Figure 2

15

5395030

could be utilised to detect the possibility of impending heart attacks in a patient. In this case, the sensor 6 has appropriate sensors and embedded software that detect heart beat patterns that are known to be precursors of a heart attack. When these are detected by the CPU the transmit section will be enabled to send an appropriate message to the centre 3 so that emergency services could be alerted. It is of course possible also to alert the wearer with the risk that the shock might advance the heart attack.

In an exactly equivalent manner the sensor just described could be associated with machinery rather than with individual humans so as to detect actual or imminent failure and alert owners or maintenance companies. The sensors can also provide useful data to manufacturers about the conditions under which a product fails.

Sensor 1c in Figure 2 is shown as having a GPS capability and in this variant of the invention the sensor 6 is a motion location sensor and the send/receive circuit 7 can be simplified so that it is a single-use message sender. Such a device can be attached to valuable items so that if they are moved the police will be alerted. Combining this feature with the GPS capability the device will also

16

5395030

be able to tell the police where the article is.

As is apparent from the foregoing description one of the advantages of the centre 3 is that it can operate on behalf of a number of clients and that it will also generate a substantial amount of secondary data.

In all of the variants described above the question of maintaining a sufficient power supply for the sensors and their associated send/receive circuits is of considerable importance. In order to conserve power each sensor may have a sleep mode in which there is minimal power consumption in such a case the sensor might only respond to a polling signal from the centre 3 and be quiescent until the polling signal has been received.

Turning now to Figure 10 of the accompanying drawings, this shows in greater detail a data reception and polling terminal 40 corresponding to the centre 3 shown in Figure 2.

Figure 10 again shows the PSTN network at 5 and sensor devices 1a...1n. As before some of these devices have only a transmit capability and others have a receive/transmit capability.

17

5395030

5 In the centre of polling terminal 40 blocks 41a, 41b and  
41c represent receive terminals for receiving data  
signals from devices similar to send only device 1a or  
for both sending data to and receiving data from sensor  
10 devices such as device 1n. Thus terminal 41a represents  
a receive-only terminal, whilst terminals 41b and 41c are  
transmit/receive terminals. Each terminal is capable of  
at least receiving data from a large number of sensor  
10 devices, and some terminals can also transmit to a large  
number of sensor devices. Associated with each terminal  
is an electronic processor. Terminal 41a is shown  
connected to a processor 42 whilst terminals 41b, 41c are  
shown connected to a data processing system 44.  
15 Processor 42 on receipt of data from a sensor device is  
programmed to recognise the source of the data and to log  
the data, including time of receipt, in an appropriate  
storage area 43.

20 Data processing system 44 is also capable of generating  
outgoing data such as polling calls and is also  
programmed to store in appropriate files details of all  
outgoing and incoming data as required by a user of the  
system. As already discussed power conservation is an  
important factor in the operation of the various sensors.  
25 Thus it will be seen that polling terminal 40 also

18

5395030

includes a system clock which can be of any suitable type. Each processor can have its own clock or, as shown a single clock can be used. Data processing system 44 also includes a storage area 46 storing Sensor Timing Data, namely the time at which each sensor which is to be polled in synchronism with that sensor's clock switching the sensor on and in addition, if there are passive sensors, the times at which data is expected to be received from the sensors. The data processing system 44 also includes a stored set of batch routines indicated at 47 in order to control the polling of target sensors at appropriate times as set by the STD file 46. The batching routine can also flag if a non-polled sensor has been quiescent for too long a period in response to data stored on the same file area. Provided that each sensor clock 9 is in nominal synchronism with the system clock or its associated clock then the combination of the synchronised clocks, the STD file and the Batch routine will ensure that each device to be polled can remain in a very lower power. Mode with only its clock operational and its memory contents refreshed except when data is required. Naturally the polling times will vary with polling intervals for security sensors being shorter than those, for example, drug testing.

25

19

5395030

CLAIMS

1. A data acquisition and transfer device comprising a  
sensor responsive to change of predetermined nature, and  
5 a transmitter for transmitting over the mobile phone  
network data concerning the occurrence of such a change  
to a receiver station.
2. A device according to claim 1. including a memory for  
10 storing the or each occurrence of a change, and a  
microprocessor controlling the transmission of stored  
data at selected intervals.
3. A device according to claim 1 including a receiver  
15 for receiving a polling signal, and microprocessor  
responsive to the receipt of a polling signal by the  
receiver to cause the transmitter to transmit data.
4. A device according to any one of the preceding claims  
20 and including a clock, the device being responsive to the  
clock output to reduce power consumption of the sensor  
by only switching the sensor on at predetermined  
intervals.
- 25 5. A device according to any preceding claim wherein the

20

5395030

sensor is incorporated in a receptacle for containing drugs to be taken by a user and wherein the removal of an item from the receptacle is the change to be detected by said sensor.

5

6. A device according to any preceding claim and comprising at least one additional sensor adapted to monitor a physiological condition of the user of the device.

10

7. A device according to any one of claims 1 to 4, wherein the sensor is adapted to monitor the location of an article.

15

8. A device according to any one of claims 1 to 4, wherein the sensor is adapted to monitor physical conditions of an article or a person.

20

9. A data acquisition and transfer system incorporating a device as claimed in any one of the preceding claims and further comprising a reception terminal for receiving data transmitted from the device and storing the received data.

25

10. A system according to claim 9 wherein the system



21

5395030

includes a generator for generating polling signals for the or each device associated with the system.

5 11. A system according to claim 10, and including a memory, and adapted to store data received from the devices as individual logs of detector events.

10 12. A data receiver station for use with at least one data acquisition and transfer device, the device having a sensor responsive to change of a predetermined nature, a transmitter for transmitting over the mobile phone network data concerning the occurrence of such a change to the data receiver station, a memory for storing the or each occurrence of a change; a receiver for receiving 15 a polling signal from the receiver station over the mobile phone network and microprocessor means responsive to the receipt of a polling signal from the receiver station to cause the transmitter to transmit data stored in said memory to said receiver station, the 20 microprocessor means including a clock and being adapted to reduce the power consumption of the sensor by only switching the sensor on at predetermined intervals as determined by the clock, and wherein the receiver station comprises a transmitter adapted to send polling signals 25 to the or each data acquisition and transfer device; a

22

5395030

receiver adapted to receive data transmitted over the mobile phone network by the or each data acquisition and transfer device, a memory adapted to store data received from the or each data acquisition and transfer device as  
5 individual logs of detected events; and

a storage area storing data representing polling times at which the transmitter of the receiver station transmits polling signals to the data acquisition and transfer device or selected data acquisition and transfer  
10 devices at intervals determined by clock means which are normally in synchronism with the clock in the or each data acquisition and transfer device so that the receiver station is adapted to send the polling signals when the or each target data acquisition and sensor device is  
15 switched on.

13. A data acquisition system comprising at least one data acquisition and transfer device, the device having a sensor responsive to change of a predetermined nature,  
20 a transmitter for transmitting over the mobile phone network data concerning the occurrence of such a change to the data receiver station, a memory for storing the or each occurrence of a change; a receiver for receiving a polling signal from the receiver station over the  
25 mobile phone network and microprocessor means responsive

23

5395030

to the receipt of a polling signal from the receiver station to cause the transmitter to transmit data stored in said memory to said receiver station, the microprocessor means including a clock and being adapted to reduce the power consumption of the sensor by only switching the sensor on at predetermined intervals as determined by the clock, and a receiver station comprising a transmitter adapted to send polling signals to the or each data acquisition and transfer device; a receiver adapted to receive data transmitted over the mobile phone network by the or each data acquisition and transfer device, a memory adapted to store data received from the or each data acquisition and transfer device as individual logs of detected events; and

a storage area storing data representing polling times at which the transmitter of the receiver station transmits polling signals to the data acquisition and transfer device or selected data acquisition and transfer devices at intervals determined by clock means which are normally in synchronism with the clock in the or each data acquisition and transfer device so that the receiver station is adapted to send the polling signals when the or each target data acquisition and sensor device is switched on.

25

24

5395030

ABSTRACTEVENT DETECTION AND TRANSMISSION SYSTEM

5 The present invention concerns a data acquisition and  
transfer device comprising a sensor responsive to change  
of predetermined nature, and a transmitter for  
transmitting over the mobile phone network data  
concerning the occurrence of such a change to a receiver  
station. Such devices can be used in monitoring patients  
10 compliance when undergoing drug trials and can form part  
of a system which polls the device for changes and keeps  
a record of all transmissions.

15


20

Figure 1

1/10

5395030


FIGURE 1

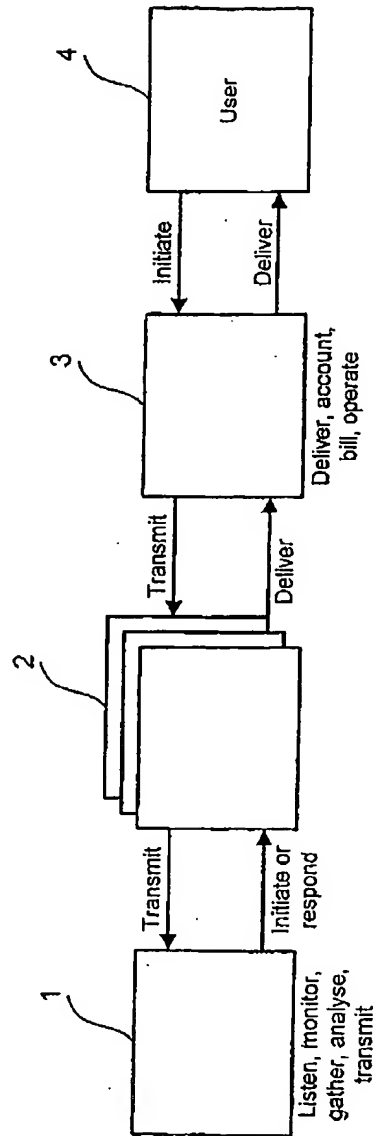

2/10

5395030


FIGURE 2

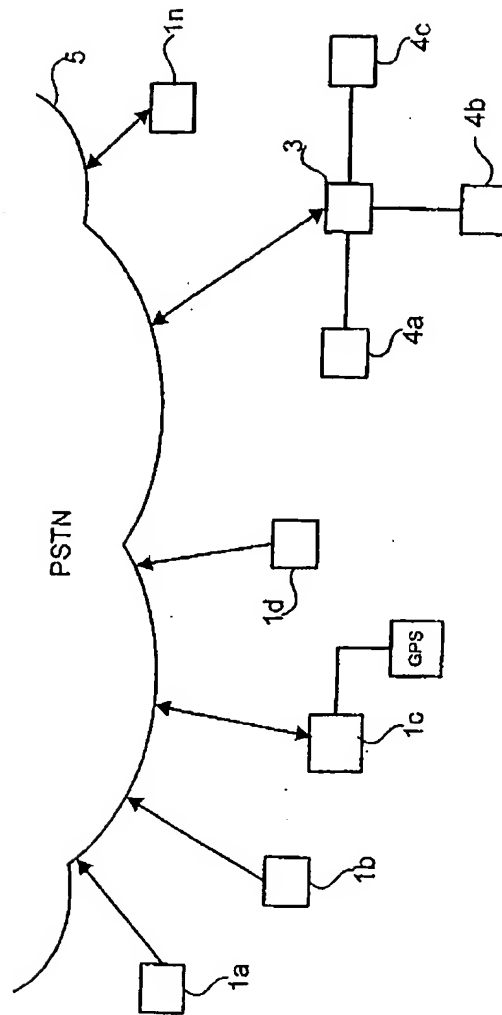

3/10

5395030


FIGURE 3

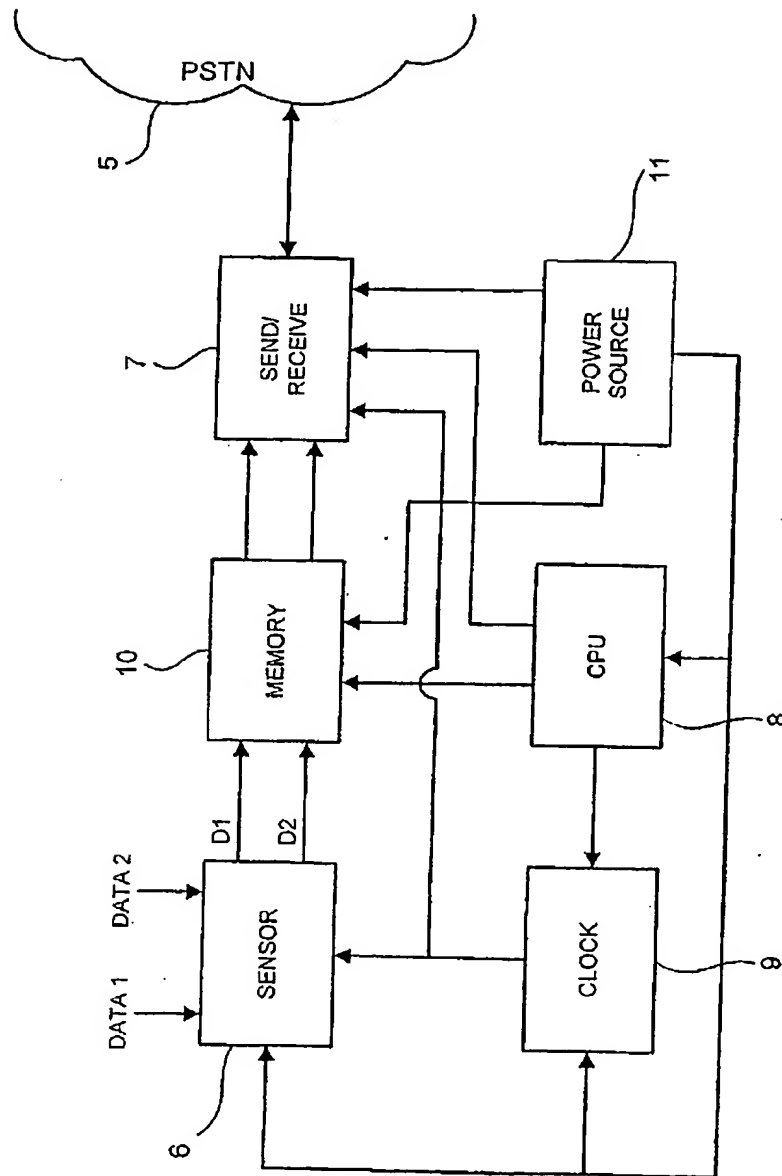

4/10

5395030

FIGURE 4

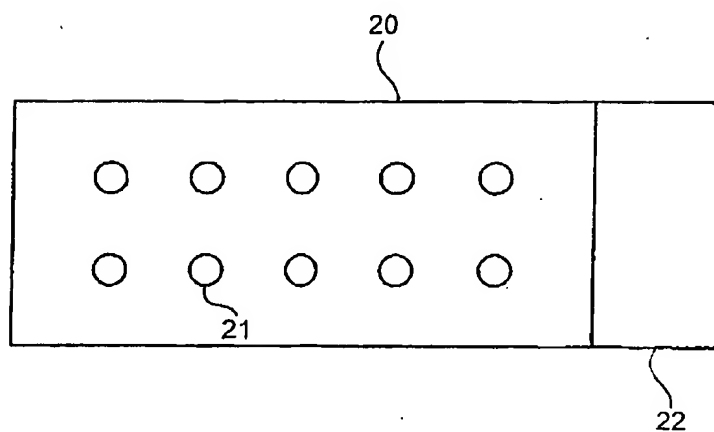




5/10

5395030


FIGURE 5

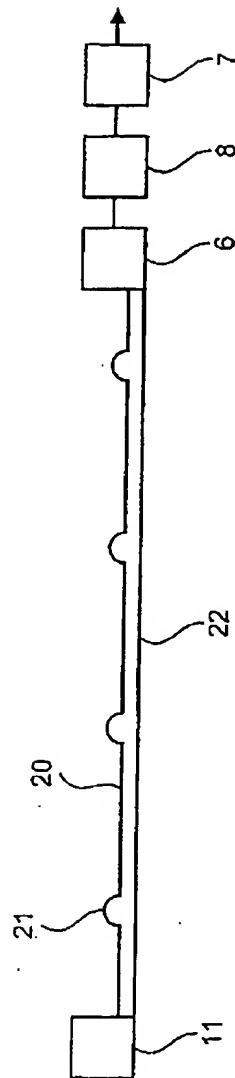

6/10

5395030


FIGURE 6

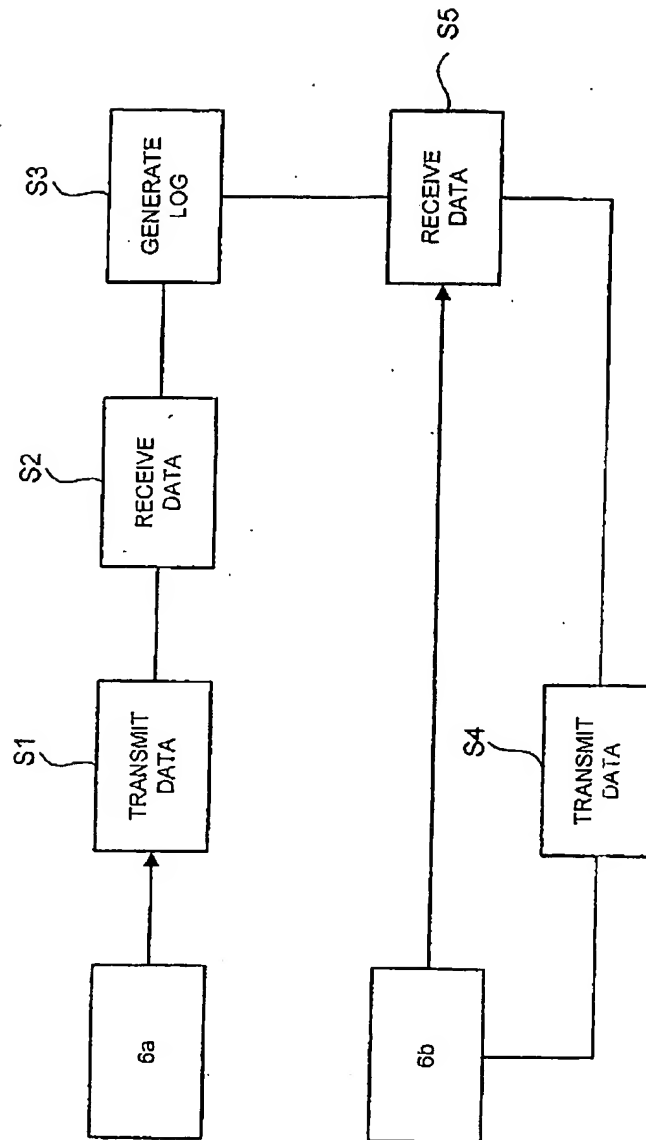

7/10

5395030

FIGURE 7

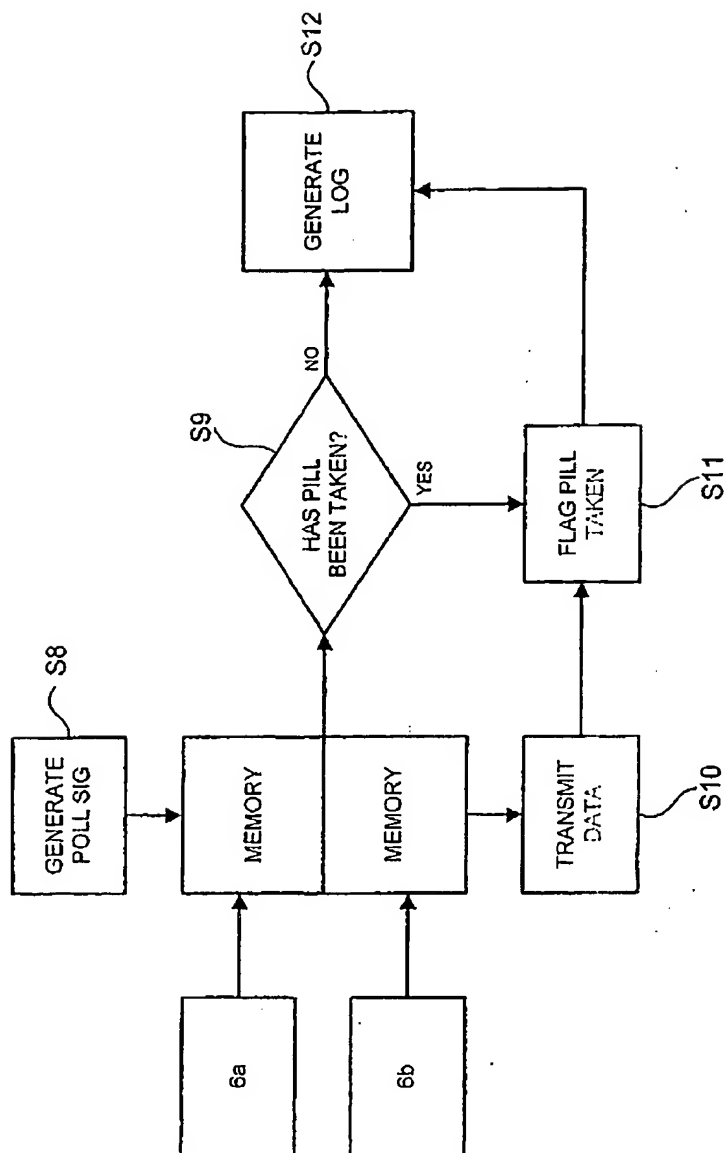

8/10

5395030

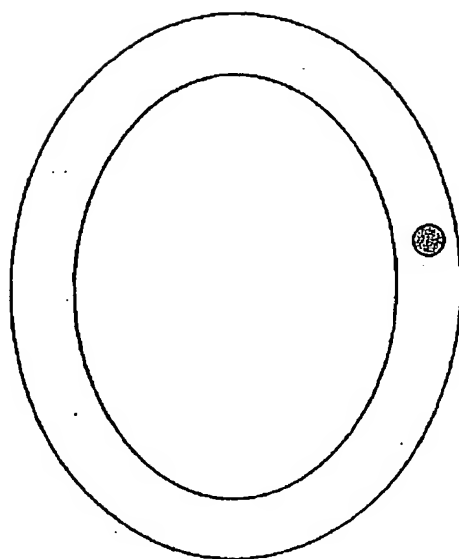


FIG. 8

9/10

5395030


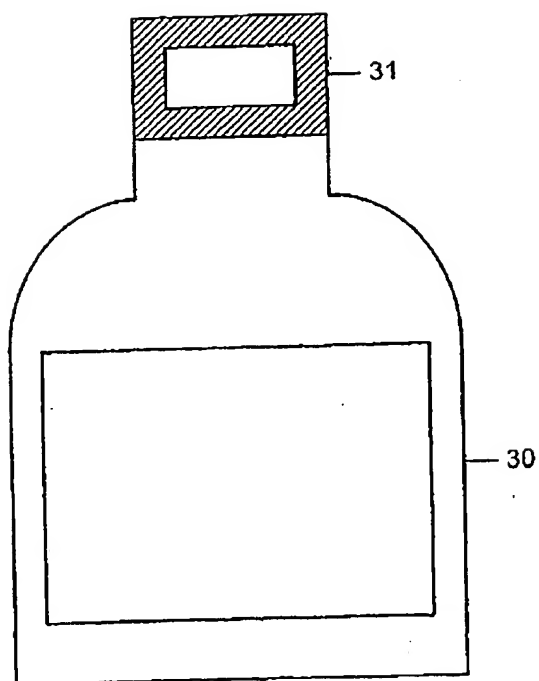


FIG. 9

10/10


5395030

FIGURE 10

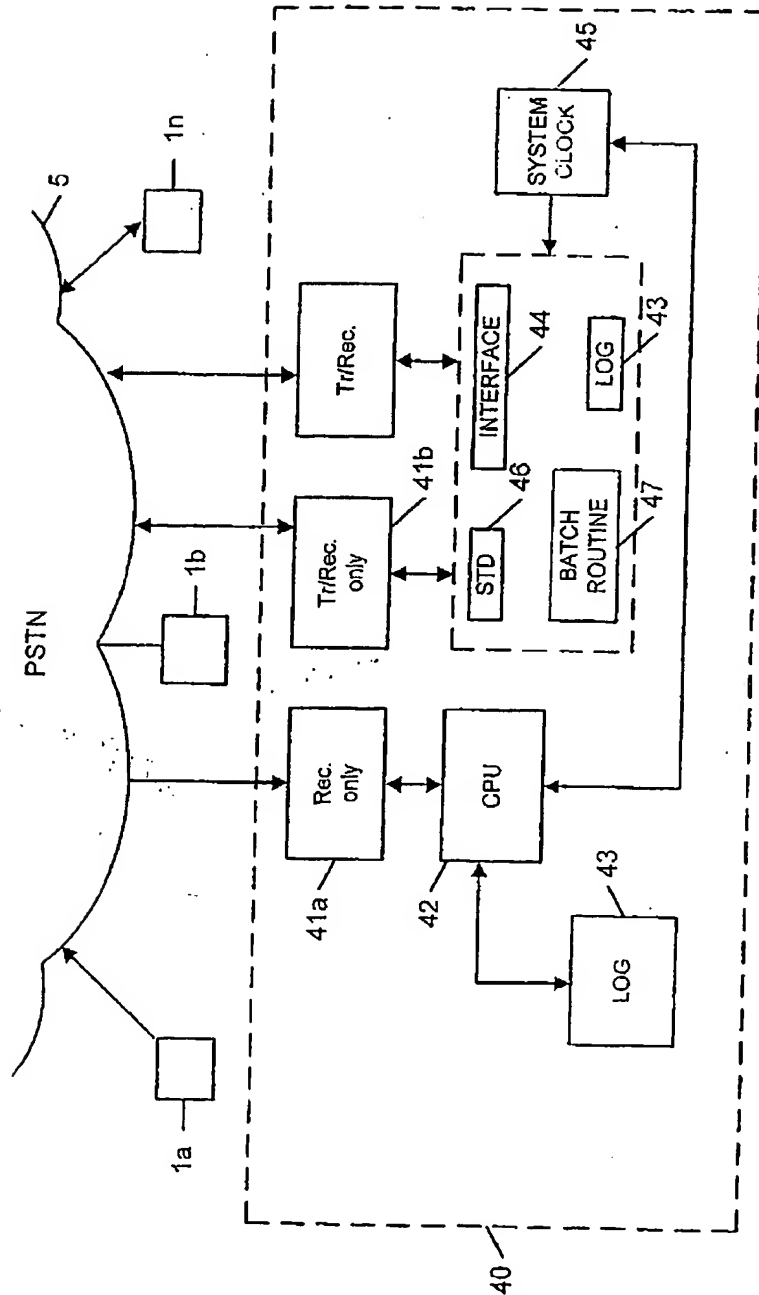

PCT Application

PCT/GB2004/000394



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**